

Teflon Probe F3S 3/12 L-60 E T




Level control for:

- waxes
- paints
- hot-melt adhesives
- chemicals

Technical data:

| | |
|---------------------------------|---|
| Material | Teflon(PTFE), nickel-coated brass |
| Type of protection | IP64 / EN 40050 |
| Mounting position | As desired, vertical position preferred |
| Permissible ambient temperature | 0°C to +130°C |
| Cable length | 6 m |

Dimensions:

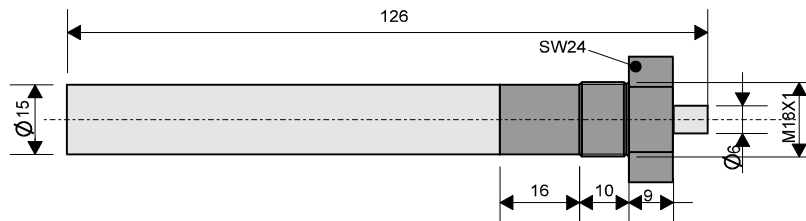

Operating Instructions:

Mounting instructions

The probe is only to be used together with the type V-25-80/120 device. Certain clearances are to be adhered to when two probes are in a single container. The probe cable is not to be laid parallel to the driving cables.

Operation

The scope of use comprises the liquid and solid medium with a maximum temperature of 130°C. During the functional test (setting), it is imperative that the test only be carried out using the medium which was actually called

up. During setting, the connected probes must be free of medium which is to be monitored.

Maintenance

The probes are maintenance-free. Devices are only to be repaired or overhauled by the manufacturer.

General

Our devices are of a high technical quality. We reserve the right to make technical alterations which are designed to meet technical progress.

Tippkemper Elektronik GmbH & Co KG

Zum Kreuzweg 12 D-59302 Oelde Tel. +49 (0) 25 29 / 93 01-50 Fax. +49 (0) 25 29 / 93 01-49