

## Teflon-Probe S-506

Level control for:




- hot-melt adhesives
- waxes
- paints
- granulates
- chemicals

### Technical data:

Enclosure material	Teflon(PTFE), nickel-coated brass
Enclosure rating EN 60529	IP65
Permitted ambient temperature	0°C to +250°C
Cable length	0,9 m

### Dimensions:

Unit: mm

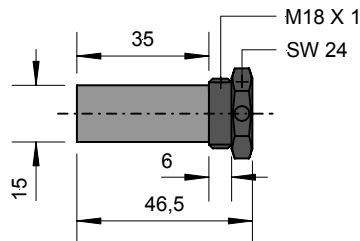

### Operating Instructions:

#### Mounting instructions

The probe is only to be used together with the type CNS-506 device. The probe cable is not to be laid parallel to the driving cables.

#### Operation

The scope of use comprises the liquid and solid medium with a maximum temperature of 250°C. During the functional test (setting), it is imperative that the test only be carried out using the medium which was actually called up. The optimal switching point is situated 5 to

10 mm over the probe end. At this point the switching point must be adjust.

#### Maintenance

The probes are maintenance-free. Devices are only to be repaired or overhauled by the manufacturer.

#### General

Our devices are of a high technical quality. We reserve the right to make technical alterations which are designed to meet technical progress.

## Tippkemper Elektronik GmbH & Co KG

Zum Kreuzweg 12, D-59302 Oelde, Germany, Tel. +49 (0) 25 29 / 93 01-50 Telefax +49 (0) 25 29 / 93 01-49  
E-mail: info@tippkemper-elektronik.de